

Delivering Excellence with high Performance Short Throw Projector.

CK4255XG / CK4155XG / CK4155WG



CK4255XG

3,700 ANSI Lumen	XGA	5.2kg
------------------	-----	-------

CK4155XG

3,300 ANSI Lumen	XGA	5.2kg
------------------	-----	-------

CK4155WG

3,200 ANSI Lumen	WXGA	5.2kg
------------------	------	-------

Built for convenience while delivering powerful visuals, CK Series projectors are ideal for on the go improvised meetings, small room conferences and excellent for classrooms. These projectors are durable with a **lamp life of up to 10,000hours**, keeping you in check for the next meeting. Assigned with a unique feature of remote controls, multiple projectors can be operate at your fingertips with little to no hassle.

Great Visuals with Integrated Audio

Innovated with a 15,000 : 1 with iris contrast ratio, images produced are clear and crispy. Accompanied with integrated speaker, it gives the realistic environment to the contents, bringing it to life.

Auto Power ON/OFF, Quick Start

Auto Power ON/OFF and Direct Power OFF features eliminates the need to always operate the power switch. Additionally, CK Series's quick start function will project the images quickly in 6 seconds.

Preventing unauthorized use of projector

Keep your projector secure with enhanced smart security for keyword protection, cabinet control panel lock, security slots, and security chains.

Remote controlling

Mutiple projectors and be operated separately and independently with the same single remote control by assigning an ID number to each projector.

Free multi-display management software

NaViSet Administrator-2 software is an all-in-one remote support solution that runs from a central location and provides monitoring, asset management and control functionality for a majority of NEC display services and Windows computers. It is ideal for multi-device installations over larger infrastructures.

Specifications

Model	NP-CK4255XG	NP-CK4155XG	NP-CK4155WG
Projector Type	3 LCD Type		
Resolution	XGA (1024dots x 768lines)		WXGA (1280dots x 800lines)
Lens	1.4x optics		
	F:1.80 / f=6.08mm Throw ratio = 80" @ 0.75m	F:1.80 / f=6.08mm Throw ratio = 80" @ 0.75m	F:1.80 / f=6.08mm Throw ratio = 80" @ 0.79m
Light source (lamp)	ECO mode off	225W	
Lamp life*1	ECO mode off	5,000H	
	NormalECO	6,000H	
	ECO mode	10,000H	
Image size (Performance guarantee range)	1.20~2.540m (50"~100")		
Light output *2 *3	ECO mode off	3,700 ANSI Lumen	3,300 ANSI Lumen
	ECO mode	Approx 60%	
Contrast ratio (white / black)*2 *3	15,000 : 1 with Iris		
Maximum resolution	Up to WUXGA (1920x1200 with Advanced AccuBlend, Pixel clock frequency : less than 155MHz)		
Synchronization range	Horizontal	15 to 100KHz (RGB: 24kHz or over)	
	Vertical	50 to 120Hz	
Keystone correction	Horizontal : Approx ±20 Max degrees (Manual) , Vertical : Approx ±20 Max degrees (Auto+Manual)		
Input terminals (Visual)	Mini D-Sub 15pin	2 <Computer1 In , Computer2 In or Computer1 Out (Selectable), R/G/B: 0.7Vp-p/75ohm, H/V Sync: 4.0Vp-p/TTL Level, Composite Sync: 4.0Vp-p/TTL Level, Y: 1.0Vp-p/75ohm (with Negative Polarity Sync), Cb/Cr: 0.7Vp-p/75ohm	
	HDMI @ (Type A 19pin)	2 HDMI <HDMI In>	
	RCA (Video)	1 <Video>, Composite Video: 1.0Vp-p/75ohm, Compatible signals: NTSC/NTSC4.43/PAL-N/PAL-M/PAL-60/SECAM	
Input terminals (Audio)	RCAx2	1 (RCAx2) <Audio L/R>, For Video, Stereo L/R : 0.5Vrms/22kohm or over	
	Stereo mini Jack	1 (RCAx2) <Audio L/R>, For Video, Stereo L/R : 0.5Vrms/22kohm or over	
Output terminal	Mini D-Sub 15pin	1 <Computer2 In or Computer1 Out (Selectable)>	
	Audio	1 <Audio out>, Selected from : Computer/Video/HDMI1/HDMI2	
Control terminals	IWB Control	1 USB-B Type <for HHT>	2 USB-B Type <for HHT>
USB port	Type A 1<USB> for USB Memory or Wireless LAN, 1.0A for external output. Type B 1<USB> for USB display		
Built-in speaker	16W Monaural		
Usage environment	Operational temperature	41 to 104deg.F (5 to 40deg.C), 20 to 80% Humidity (Non-Condensing) (ECO mode selected automatically at 95°F to 104°F/35°C to 40°C)	
	Storage temperature	14 to 122deg.F (-10 to 50deg.C) , 20 to 80% Humidity (Non-Condensing)	
Power requirements	100-240VAC 50/60Hz		
Input current	1.6A		
Power consumption (typical)	ECO mode off	299W@200V	
	ECO mode	205W@200V	
	Standby (Normal)	0.5W or less@200V	
Dimensions (W x H x D)	459mm x 225mm x 381mm / 18.08" x 2.86" x 15.12" inch		
Weight	5.2Kg		
OSS *4	Yes		

Note :
 *1 : It lights up continuously
 *2 : This is the light output value (lumens) when the [PRESET] mode is set to [HIGH-BRIGHT] and set to [Auto ECO].
 If any other mode is selected as the [PRESET] mode, the light output value may drop slightly.
 *3 : Compliance with ISO21118-2012

Aries Distance Chart

XGA

0.63 inch LCD		C= 0.01 * x + -0.011 - 22.8	
Width	Height	C:Throw distance[m]	
XGA 1024	768	X:Screen Size (Diagonal)[inch]	
LCD 12.8	9.6 mm	Lens-Cabinet 22.8 mm	
Pixel 12.5	12.5 μm	Lens Offset 5.28 mm	

Screen Size				B		C				D		α			
Diagonal	Width	Height	inch	mm	inch	mm	inch	mm	inch	mm	wide	tele	degree	degree	
50	1270	40	1016	30	762	17	419	18	455	-	-	2	38	42.6	-
60	1524	48	1219	36	914	20	503	22	552	-	-	2	46	42.3	-
70	1778	56	1422	42	1067	23	587	26	650	-	-	2	53	42.1	-
80	2032	64	1626	48	1219	26	671	29	748	-	-	2	61	41.9	-
90	2286	72	1829	54	1372	30	754	33	845	-	-	3	69	41.8	-
100	2540	80	2032	60	1524	33	838	37	943	-	-	3	76	41.6	-
80	2032	64	1626	48	1219	26	671	29	748	-	-	2	61	41.9	-

B=Vertical distance between lens center and screen center
 C=Throw distance
 D=Vertical distance between lens center and bottom of screen(top of screen for desktop)
 α=Throw angle

WXGA

0.59 inch LCD		C= 0.01 * x + -0.011 - 22.8	
Width	Height	C:Throw distance[m]	
WXGA 1280	800	X:Screen Size (Diagonal)[inch]	
LCD 12.8	8.0 mm	Lens-Cabinet 22.8 mm	
Pixel 10.0	10.0 μm	Lens Offset 5.28 mm	

Screen Size				B		C				D		α			
Diagonal	Width	Height	inch	mm	inch	mm	inch	mm	inch	mm	wide	tele	degree	degree	
50	1270	42	1067	26	660	17	436	19	485	-	-	4	106	41.9	-
60	1524	51	1295	32	813	21	536	23	588	-	-	5	130	42.4	-
70	1778	59	1499	37	940	24	620	27	692	-	-	6	150	41.9	-
80	2032	68	1727	42	1067	28	704	31	796	-	-	7	171	41.5	-
90	2286	76	1930	48	1219	32	805	35	900	-	-	8	195	41.8	-
100	2540	85	2159	53	1346	35	888	39	1003	-	-	8	215	41.5	-
80	2032	68	1727	42	1067	28	704	31	796	-	-	7	171	41.5	-

B=Vertical distance between lens center and screen center
 C=Throw distance
 D=Vertical distance between lens center and bottom of screen(top of screen for desktop)
 α=Throw angle

Remote control



Options

Replacement lamp
 NP41LP

*Image only for illustration




Wireless LAN unit

NPO5LM

*Image only for illustration



Distance Chart

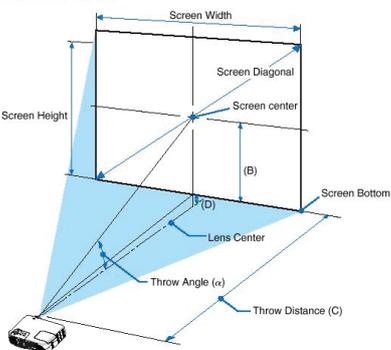

B = Vertical distance between lens center and screen center
 C = Throw distance
 D = Vertical distance between lens center and bottom of screen (top of screen for ceiling application)
 α = Throw angle

NOTE: Distances may vary +/-5%.



- Do not stare into the lens while in use.
- The projector can be unplugged during its cool down period after it is turned off. Parts of the projector become heated during net is hot. Use caution when picking up the projector immediately after it has been operating.
- Use caution when putting the projector in the soft case immediately after the projector has been operating. The projector cabi

NavSet is a trademark or registered trademark of NEC Display Solutions, Ltd. in Japan, the United States and other countries.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

Other hardware and software names are trademarks or registered trademarks of the respective manufacturers.

All rights reserved. All specifications are subject to change without notice. July 2018

<http://www.nec-display.com/ap/>